


# 30 TON RENTAL AC UNIT (With Heat)

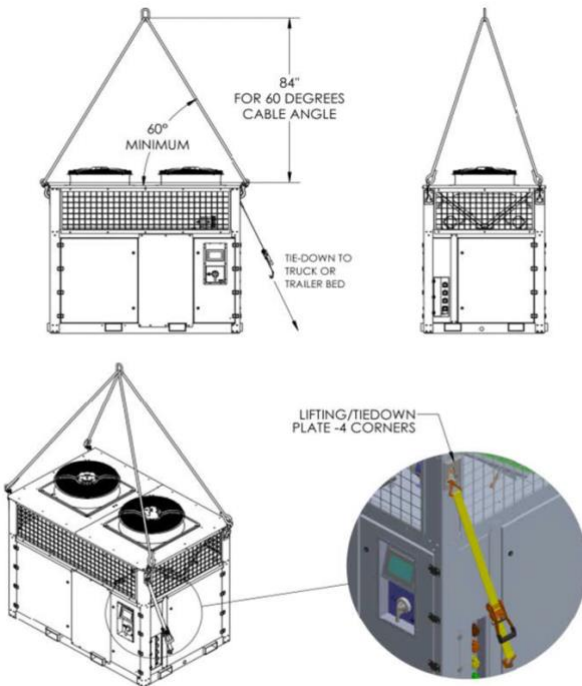

**LIFTING AND TIE DOWN NOTES**

- LIFTING CABLE SHALL BE RATED AT 3 TIMES THE UNIT WEIGHT
- HOOKS, CLEAVES, RINGS AND ALL OTHER LIFTING APPARATUS SHALL BE RATED AT 3 TIMES THE UNIT WEIGHT
- USE SPREADER BAR AND/OR LIFT BEAM IF 60 DEGREE ANGLE CAN NOT BE ACHIEVED WITH CABLES
- FOR TIE DOWN USE QTY 4 - 2"-3" WIDE STRAPS - ONE AT EACH CORNER

Technical Data	
Model Number	AC30TON
CFM	10,000
Capacity Cooling	360,000 BTUH
Capacity Heating	72kW
Voltage	480V 3PH 60Hz
FL Amps - Cooling	92 AMPS
FL Amps - Heating	103 AMPS
FL Amps- Heat/Cool	195 AMPS
SCCR Interrupt Rating	10KAIC
Minimum Circuit Ampacity	225 AMPS
Enclosure Type	Type 3R
Control	110V
Control	24V DC
Compressor	
FLA	32 AMPS x 2
Circuit Protection	32 AMPS
DIMENSIONS/MORE	
Static Pressure	5"
Duct Connections	2 Outlets
Duct	20"
Washable Filters	
Refrigerant	R-410A
DBA @20'	76 DBA
Weight	2500 LBS.
LENGTH	7' 10"
WIDTH	5' 0"
HEIGHT	7' 0"